Ideal for handling quarter, half and special pallets.

Width across forks manually adjustable (140-585 mm)

Particularly quiet operation

Robust and reliable

Fast lift as standard (up to 120 kg)



AM V05


Hand pallet truck for display and part load pallets (500 kg)

The AM V05 is the optimum solution for collecting quarter and half Euro pallets. It offers real advantages wherever display pallets have to be moved frequently, e.g. on the shop floor. Small special pallets can also be transported because the forks can be manually adjusted in the range of 140 mm to 585 mm.

Whatever you transport with the AM V05: The advantages of user-friendliness, robustness and the reliability of Jungheinrich hand pallet trucks pay dividends. Standard Euro pallets can also be transported.



AM V05

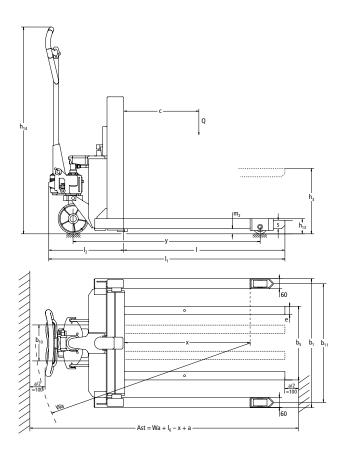



Issue: 08/2006

Technical data in line with VDI 2198

		<u> </u>			
dentification	1.1	Manufacturer (abbreviation)			Jungheinrich
	1.2	Model			AM V05
	1.3	Drive			manual
	1.4	Manual, pedestrian, stand-on, seated, order picker operation			hand
	1.5	Load capacity/rated load	Q	t	0.5
	1.6	Load centre distance	С	mm	400
	1.8	Load distance	х	mm	820
	1.9	Wheelbase	У	mm	1,120
	2.1	Service weight		kg	155
	2.2	Axle load with load front/rear		kg	320 / 325
els / frame	2.3	Axle load without load front/rear		kg	101 / 54
	3.1	Tyres			N,C
	3.2	Tyre size, front		mm	Ø 180 x 50
	3.3	Tyre size, rear		mm	Ø 82 x 40
	3.5	Wheels, number front/rear (x = driven wheels)			2/2
	3.6	Tread width, front	b ₁₀	mm	122
Basic dimensions	3.7	Tread width, rear	b ₁₁	mm	700
	4.4	Lift	h ₃	mm	390
	4.9	Height of tiller in drive position min. / max.	h ₁₄	mm	1,210
	4.15	Height, lowered	h ₁₃	mm	85
	4.19	Overall length	l ₁	mm	1,405
	4.20	Length to face of forks	l ₂	mm	450
	4.21	Overall width	b ₁ /b ₂	mm	760
	4.22	Fork dimensions	s/e/l	mm	50 / 50 / 955
	4.25	Width across forks	b ₅	mm	1401)
	4.26	Width between support arms/loading surfaces	b ₄	mm	640
	4.32	Ground clearance, centre of wheelbase	m ₂	mm	30
	4.33	Aisle width for pallets 1000×1200 sideways	Ast	mm	1,805
	4.34	Aisle width for pallets 800 × 1200 lengthways	Ast	mm	2,005
	4.35	Turning radius	W _a	mm	1,425
Perform- ance data	5.3	Lowering speed, laden/unladen		m/s	0.09 / 0.05
erfe Se					
a E					

Benefit from the advantages



A half pallet is picked up from a standard Euro pallet



Ergonomic operating handle



Picking up a standard Euro pallet

Designed for many applications

Loading and unloading of small load carriers on a Euro pallet cannot be achieved with a standard hand pallet truck. The AM V05 provides the solution.

Due to individually adjustable forks from 140–585 mm, non-standard load carriers can also be picked up and transported. Standard Euro pallets can also be transported.

Easy to handle

The easy-to-use controls are equally suitable for both left and right-handed operators. The special lowering valve enables loads to be lowered precisely.





Earth Moving and Material Handling Equipment Jeddah-Al-Nahda Dist-Prince Sultan Str. Kingdom of Saudi Arabia P.O. Box 52269 Jeddah 21563 Email kbahaa@arabian-roots.com Mob +966 590950582

Tel +966 126996628 Ext: 245

Fax +966 126221473

Jungheinrich Aktiengesellschaft

Friedrich-Ebert-Damm 129 D-22047 Hamburg Telephone +49 40 6948-0 Telefax +49 40 6948-1777

info@jungheinrich.com www.jungheinrich.com The German production facilities in Norderstedt, Moosburg and Landsberg are certified.



