

Compact and manoeuvrable truck

Version with and without cab

Loading area can carry up to 1.5 t

Outstanding driving comfort thanks to sprung chassis

Electric hydraulic steering for fatigue-free travel



## EZW 515

### Electro flatbed truck (1,500 kg)

Robust, versatile and economic: these are the advantages of our electric flatbed truck EZW 515. Whether indoors or outdoors – with load capacities up to 1.5 tons, this heavy-duty, high-performance flatbed truck is suitable for every application.


But that is not all: Our EZW 515 also offer you not only top driving comfort and safety but also great performance combined with low energy consumption:

- Applications within maintenance, speed in factory delivery or as four wheel tow tractor.
- Able to meet requirements for load gates, tarpaulin top or boxed housings.
- Comfort suspension system: The fully sprung chassis with springs and shock absorbers on every wheel not only protects the driver's back, but also the truck.
- Robust design: The strong steel chassis and heavy-duty formed parts last the truck's entire service life even when used day in, day out.

- The optional lighting with environmentally friendly LED lighting elements is insensitive to shocks.
- Suitable couplings can be attached.
- Spacious operator position: The low footstep and the spacious footwell provide as well as steering wheel and operation element positions an ergonomic working.
- Electro-hydraulic steering enables precise driving with less effort.
- Automatic parking brake with anti-roll back function: When the truck comes to a standstill on slopes, it is secured by an automatic parking brake.
- 48-volt three-phase AC motor provide for strong acceleration and a high top speed.
- Regenerative braking: The energy won while braking is returned to the battery, thus extending its operating time.

Conclusion: Sophisticated ergonomics and technology in the form of our EZW 515 ensure safe, effortless working combined with cost and energy efficiency.

# EZW 515

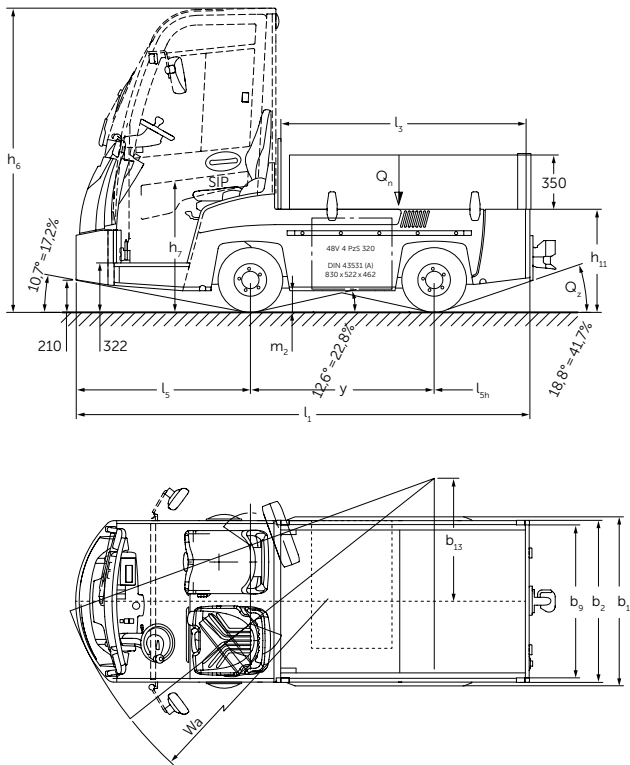

# Technical data in line with VDI 2198

Identification	1.1	Manufacturer (abbreviation)		Jungheinrich
	1.2	Model		<b>EZW 515</b>
	1.3	Drive		Electric
	1.4	Manual, pedestrian, stand-on, seated, order picker operation		seat
	1.5	Load capacity/rated load	Q t	1.5
	1.7	Rated tractive power	F N	600
Weights	1.9	Wheelbase	y mm	1,200
	2.1.1	Net weight incl. battery (see row 6.5)	kg	1,600
	2.2	Axle load with load front/rear	kg	1,310 / 1,728
Wheels / frame	2.3	Axle load without load front/rear	kg	932 / 578
	3.1	Tyres		SE
	3.2	Tyre size, front	mm	4.00-8/6 PR
	3.3	Tyre size, rear	mm	4.00-8/6 PR
	3.5	Wheels, number front/rear (x = driven wheels)		2 / 2x
	3.6	Tread width, front	b <sub>10</sub> mm	905
	3.7	Tread width, rear	b <sub>11</sub> mm	900
Basic dimensions	4.7	Height of overhead guard	h <sub>6</sub> mm	1,990
	4.8	Seat height/stand height	h <sub>7</sub> mm	825
	4.12	Coupling height	h <sub>10</sub> mm	250
	4.12.1	2nd coupling height	mm	340
	4.12.2	3. Coupling height	h <sub>10</sub> mm	430
	4.13	loading height without load	h <sub>11</sub> mm	665
	4.16	loading area length	l <sub>3</sub> mm	1,600
	4.18	Loading area width	b <sub>9</sub> mm	1,000
	4.19	Overall length	l <sub>1</sub> mm	2,762
	4.21	Overall width	b <sub>1</sub> /b <sub>2</sub> mm	1,100 / 1,100
	4.32	Ground clearance, centre of wheelbase	m <sub>2</sub> mm	148
4.35	Turning radius	W <sub>a</sub> mm	2,477	
4.36	Smallest pivot point distance	b <sub>13</sub> mm	691	
Performance data	5.1	Travel speed, laden/unladen	km/h	18
	5.5	Drawbar pull w. / w.o. load	N	600
	5.6	Max. drawbar pull, laden/unladen	N	4,500
	5.10	Service brake		hydraulic
Electrics	6.1	Drive motor, output S2 60 min.	kW	4.3
	6.3	Battery as per DIN 43531 /35/36 A, B, C, no		A
	6.4	Battery voltage/nominal capacity K5	V/Ah	48 / 320
	6.5	Battery weight	kg	500
Misc.	8.1	Type of drive control		AC speedCONTROL
	8.4	Sound pressure level at operator's ear as per EN 12053	dB (A)	57
	8.5	Trailer coupling, model/type DIN		Plug coupling 3-stage
	8.6	Steering		electro-hydraulic

# Benefit from the advantages



Reliable LED lighting (optional)



Different couplings available (optional)



Clear arrangement of all operating and display controls



Also available without cabin

## Innovative 3-phase AC technology

Jungheinrich 3-phase AC motors offer you higher performance while simultaneously reducing operating costs.

- High level of efficiency with excellent energy management.
- Powerful acceleration and high top speed, even when laden.
- Rapid change in direction of travel.
- No carbon brushes - maintenance-free drive motor.
- Two-year warranty on the drive motor.

## Comfortable and safe operation

The SpeedControl impulse electronic management system and the automatic electrical braking system ensure comfortable and safe operation of the vehicle, with adjustment opportunities to suit any application:

- The fully sprung chassis with springs and shock absorber guarantees traction at all times.
- The automatic parking brake ensures that driving off is safe, even on slopes.
- The travel speed set using the accelerator is maintained in all situations.
- Energy recovery: Regenerative braking when decelerating.
- Programmable crawl speed switch allows travel at reduced speed.

- Three alternative travel programs can be set to suit every specific need.
- Seeing and being seen: Two-stage LED lights (daytime running lights, travel lights).

## Optimised ergonomics

- Easy entry and exit due to the low footstep.
- Spacious operator position with large footwell.
- Short distances from the operator position to the load area.
- Inching controls for simple coupling and decoupling (optional).
- Non-marking super-elastic wheels (optional).
- Well organised with many storage areas for the operator.

## Robust construction for the hardest applications

- Chassis of 8 mm high quality steel.
- Extra-high chassis apron to the front.
- Robust high intensity, LED (light emitting diode) rear lights and indicators (optional).
- Lateral protection provided by skirting (optional).

## Long operating times

Energy-efficient 3-phase AC technology and high battery capacities allow for long

operating times. Optional built in charger offer easy charging at standard electricity sockets.

- Standard version: 4 PzS 320 Ah.

## Always informed

Easily read display and instruments always allows a complete overview of battery discharge indication, operation hours, speed and fault diagnostics.

- PIN activation of the vehicle (optional).
- Adjustable travel parameters.
- Various symbols inform about the status of the truck.

## Additional equipment (optional)

Comprehensive accessories allow for individual tailoring to your requirements:

- Structures on platform: Tail lifts, platforms or flat beds.
- Reverse movement device for simple coupling and decoupling.
- Holder for radio data components.
- Different couplings.
- On-board charger: Charging the built-in battery at standard sockets.
- Cabins with a variety of configurations for use outside. Also available without cabin.
- Further options for the right configuration of the platform truck.
- Also available: EZS tow tractor series 5 (basis truck for EZW 515).

مجموعة الجذور  
العربية



Roots Group  
ARABIA

Earth Moving and Material Handling Equipment  
Jeddah-Al-Nahda Dist-Prince Sultan Str.  
Kingdom of Saudi Arabia  
P.O. Box 52269 Jeddah 21563  
Email kbahaa@arabian-roots.com  
Mob +966 590950582  
Tel +966 126998628 Ext: 245  
Fax +966 126221473

The German production facilities in Norderstedt, Moosburg and Landsberg are certified.

ISO 9001  
ISO 14001

Jungheinrich fork lift trucks meet European safety requirements.



**JUNGHEINRICH**  
Machines. Ideas. Solutions.